

# Model DL3.100.500



## Construction

- 6.0" width x 0.50" height x 0.9375" depth
- 304 Stainless Steel
- Heavy 24 gauge Stainless Steel
- 15/16" width fits baluster spacings 2" thru 4"
- Fixture held in place during rail assembly w/o fasteners
- Mechanically fastened LED package
- UL 1838 Listed Product




## Electrical



- 1.0 watt LED package
- 3000K white output
- Filters available for 2700K or 4200K output
- Life expectancy up to 40,000 hours
- Output similar to 5.0 watts
- Lumen output 60
- Fully dimmable LEDs
- Low voltage 12vAC operation
- Compatible with all low voltage lighting systems
- 72" long 18/2 leads for connection
- Magnetic or electronic transformer compatible

## Dimensions

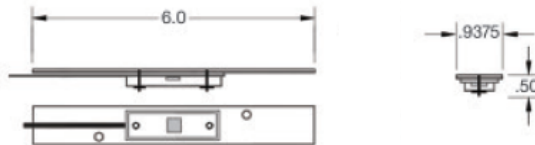

dimensions are approximate



MANUFACTURED in U.S.A.