


Model IP8.100.xxx

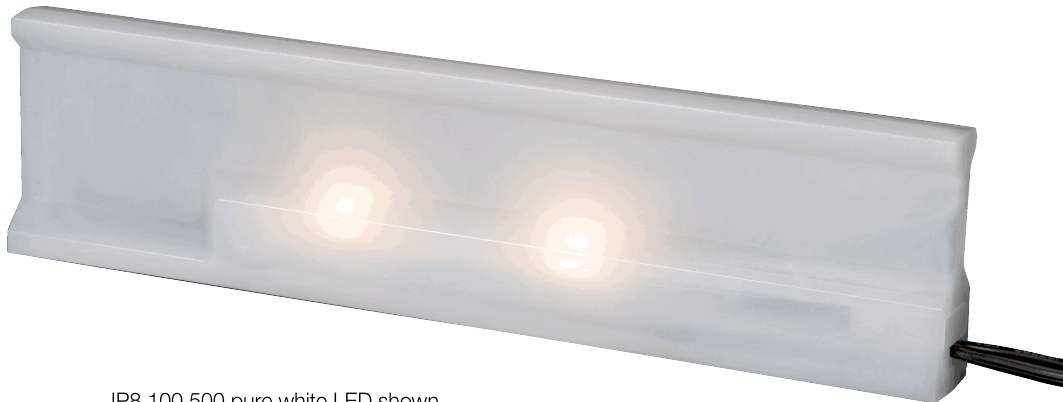

IP8.100.500 pure white LED shown

Construction

- 8.0" length x 0.75" width x 2.0" height
- Molded from UV resistant polycarbonate
- Completely encapsulated integrated LED circuitry
- IP67 Rated
- UL 1838 Listed Product

Please avoid using roller tampers on Pavelux® fixtures.
Damage may occur if a roller tamper is used upon installation.



Electrical




- Low voltage 12vAC operation
- 72" long 18/2 leads for connection
- Long life LED package
- Fully dimmable LEDs
- Magnetic or electronic transformer compatible

Fixture available in the following LED color outputs:

- IP8.100.500 / 3000K Pure White / 2.0 watt consumption / output similar to 10.0 watts
- IP8.100.550 / 2400K Ultrawarm White / 0.50 watt consumption / output similar to 8.0 watts

Dimensions

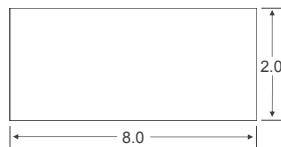

dimensions are approximate



pavelux®