

# Model IL6000.xxx.500



IL6000.150.500 Stainless Steel finish shown with Thinsert® sleeve for easy extraction and reinsertion after installation

## Construction

- 6.0" width x 0.875" height x 3.0" depth
- 304 Stainless Steel unibody construction
- Heavy 20 gauge Stainless Steel
- Unibody construction
- Integrated cleats for easy retrofits
- LED package fastened to removable Stainless Steel bracket
- Supplied with Thinsert® sleeve for easy extraction and reinsertion of fixture after installation
- UL 1838 Listed Product




## Electrical




- 2.0 watt LED package
- 3000K white output
- Filters available for 2700K or 4200K output
- Life expectancy up to 40,000 hours
- Output similar to 10.0 watts
- Lumen output 120
- Fully dimmable LEDs
- Low voltage 12vAC operation
- Compatible with all low voltage lighting systems
- 72" long 18/2 leads for connection
- Magnetic or electronic transformer compatible

## Dimensions

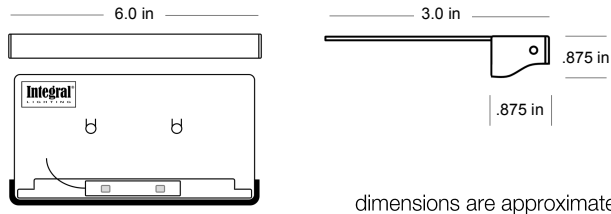

## Approximate light output with adjustments

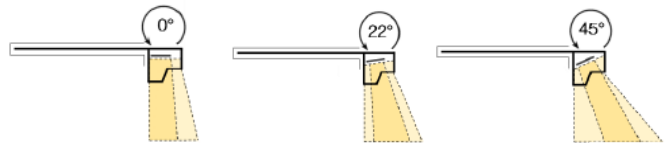

## 5 Finishes



Stainless .150



Carbon .700



Textured Bronze .710



Platinum .730



Sandstone .770