

model IL6000.xxx.500



Construction


- > Dimensions 6" width x .75" height x 3" depth
- > Stainless steel 20g alloy 304
- > Unibody construction
- > Stainless steel LED bracket adjusts up to 45 degrees
- > Supplied with Thinsert® sleeve
- > Lifetime Limited Warranty
- > C/US UL Listed 1838 Low Voltage Landscape Lighting



Electrical

- > Low voltage 12vAC operation
- > Overmolded LED circuitry with renewable materials
- > IP68 certified waterproof
- > 2 watt energy consumption
- > Output similar to 10 watts
- > Lumen output 120
- > 72" long 18/2 leads for connection
- > Magnetic or electronic transformer compatible
- > LED life expectancy up to 40,000 hours

Dimensions

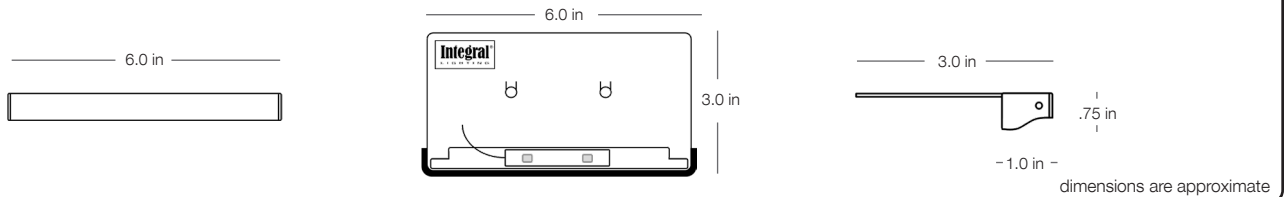

LED Color Outputs



2700K warm white
add suffix .200 to model number



3000K pure white
order as listed below



4200K cool white
add suffix .400 to model number

Fixture Finishes



IL6000.150.500
Brushed Stainless Steel



IL6000.700.500
Carbon



IL6000.710.500
Textured Bronze



IL6000.730.500
Platinum



IL6000.770.500
Sandstone



MADE IN THE USA