


model IP8.100.xxx



Construction


- > Dimensions 8" length x 2" height x .75" width
- > UV resistant polycarbonate for durability
- > Integrated strain relief
- > Lifetime Limited Warranty
- > C/US UL Listed 1838 Low Voltage Landscape Lighting

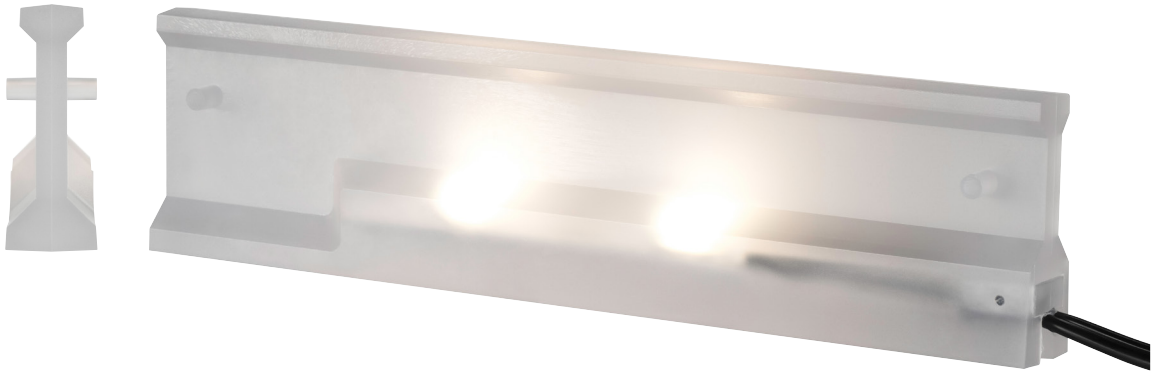

Electrical


- > Low voltage 12vAC operation
- > IP67 certified waterproof
- > Choice of energy consumption and color appearance (listed below)
- > 72" long 18/2 leads for connection
- > Magnetic or electronic transformer compatible
- > LED life expectancy up to 40,000 hours

Dimensions

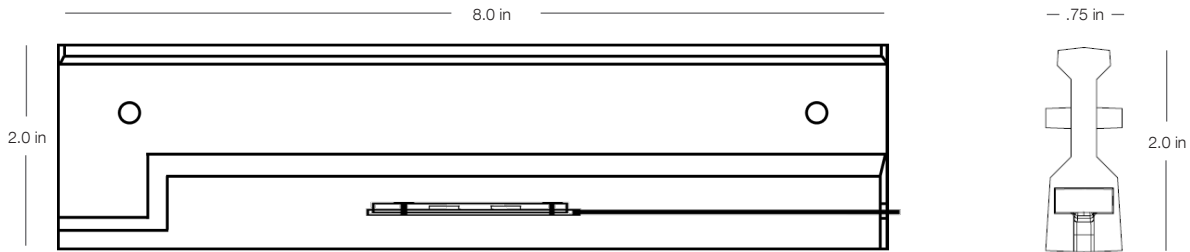

dimensions are approximate

LED Color Outputs



IP8.100.550
2400K ultrawarm white
.5 watt energy consumption
order model with suffix .550



IP8.100.500
3000K pure white
2 watt energy consumption
order model with suffix .500

Please avoid using roller tamers on pavelux® fixtures. Damage may occur if a roller tamer is used upon installation.

