

# model IL6000.xxx.500



## Construction


- > Dimensions 6" width x .75" height x 3" depth
- > Stainless steel 20g alloy 304
- > Unibody construction
- > Stainless steel LED bracket adjusts up to 45 degrees
- > Supplied with Thinsert® sleeve
- > Lifetime Limited Warranty
- > C/US UL Listed 1838 Low Voltage Landscape Lighting



## Electrical

- > Low voltage 12vAC operation
- > Overmolded LED circuitry with renewable materials
- > IP68 certified waterproof
- > 2 watt energy consumption
- > Output similar to 10 watts
- > Lumen output 120
- > 72" long 18/2 leads for connection
- > Magnetic or electronic transformer compatible
- > LED life expectancy up to 40,000 hours

## Dimensions

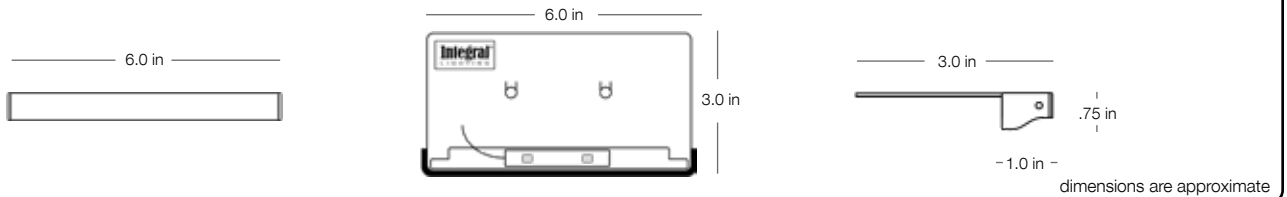

## LED Color Outputs



2700K warm white  
add suffix .200 to model number



3000K pure white  
order as listed below



4200K cool white  
add suffix .400 to model number


## Fixture Finishes



IL6000.150.500  
Brushed Stainless Steel




IL6000.700.500  
Carbon



IL6000.710.500  
Textured Bronze



IL6000.730.500  
Platinum



IL6000.770.500  
Sandstone



MADE IN THE USA