


model DL3.xxx.500



Construction


- › Dimensions 3" width x .5" height x 1" depth
- › Stainless steel 18g alloy 304
- › Install with color-coordinated shroud when unable to mount in rail cavity
- › Lifetime Limited Warranty
- › C/US UL Listed 1838 Low Voltage Landscape Lighting

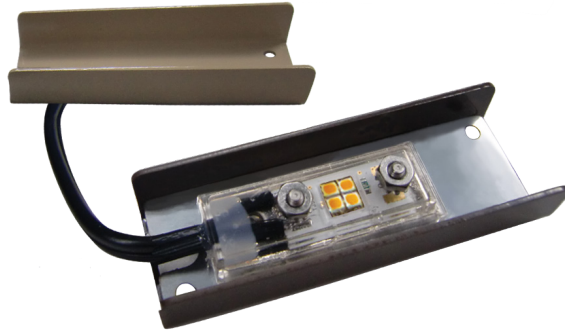

Electrical

- › Low voltage 12vAC operation
- › Overmolded LED circuitry with renewable materials
- › IP68 certified waterproof
- › 1 watt energy consumption
- › Output similar to 5 watts
- › Lumen output 60
- › 72" long 18/2 leads for connection
- › Magnetic or electronic transformer compatible
- › LED life expectancy up to 40,000 hours

Dimensions



dimensions are approximate

LED Color Outputs



2700K warm white
add suffix .200 to model number




3000K pure white
order as listed below



4200K cool white
add suffix .400 to model number

Fixture Finishes

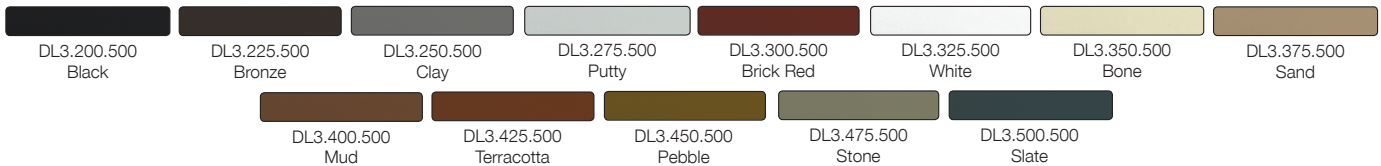

MADE IN THE USA